


STICK CURTAIN WALL

CLASS AND GRADE	Architectural Grade AW-PG100-FW
ALUMINUM ALLOY	T6063-T5
TESTING STANDARD	AAMA / WDMA / CSA101 / I.S.2 / A440 (NAFS)
FRAME DEPTH	114.5mm/150mm
TYPICAL WALL THICKNESS	2mm
MINIMUM SIZE	800mm x 1200mm
MAXIMUM SIZE	3000mm x 2600mm

TYPICAL CONFIGURATIONS

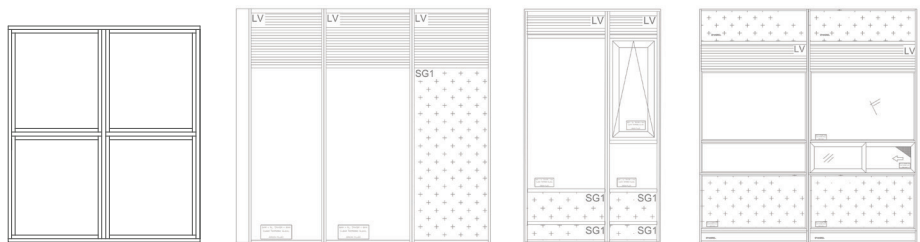

STANDARD INFILL OPTIONS	INSULATED GLASS, SPANDREL, METAL PANEL, LOUVER
INSULATION GLASS UNITS	28mm, 5mm Outer Pane, 5mm Inner Pane 30 mm, 6mm outer Pane, 6mm Inner Pane Argon, E-Coated
THERMAL BREAK	Extruded Polyamide
GASKET MATERIAL	Extended EPDM
WEATHER STRIPPING	Triple Fin Pile
HARDWARE	See Accessories

STICK CURTAIN WALL

