
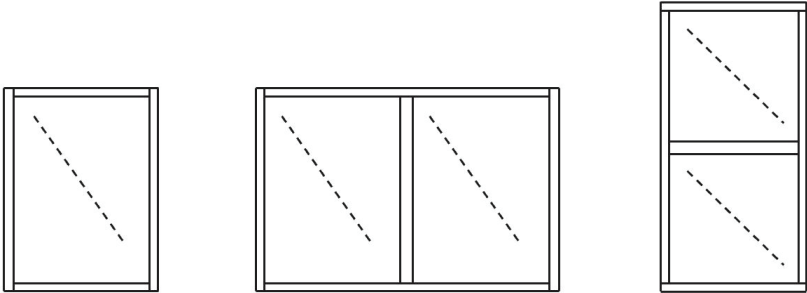


FIXED WINDOW

CLASS AND GRADE	Architectural Grade AW-PG100-FW	
ALUMINUM ALLOY	T6063-T5	
TESTING STANDARD	AAMA / WDMA / CSA101 / I.S.2 / A440 (NAFS)	
FRAME DEPTH	114.5mm	
TYPICAL WALL THICKNESS	1.6mm	
MINIMUM SIZE	500mm x 500mm	
MAXIMUM SIZE	1,800mm x 2,100mm	
TYPICAL CONFIGURATIONS		
STANDARD INFILL OPTIONS		
INSULATED GLASS UNITS	25mm Overall, 5mm Outer Pane, 5mm Inner Pane Argon, E-Coated, Cardinal E66, Warm Edges	
THERMAL BREAK	Extruded Polyamide	
GASKET MATERIAL	Extended EPDM	
WEATHER STRIPPING	Triple Fin Pile	
HARDWARE	See Accessories	
OTHER OPTIONS	• Exterior Applied Muntins • Perimeters and Sills • Exterior Pannings and Interior Trims • Structural Mullions • Vertically or Horizontally Stacked • Aluminum Extruded Sill • PVC Sill • Tempered Glass • Frosted Glass • Brid Friendly Glass	

4500F SYSTEM

FIXED WINDOW

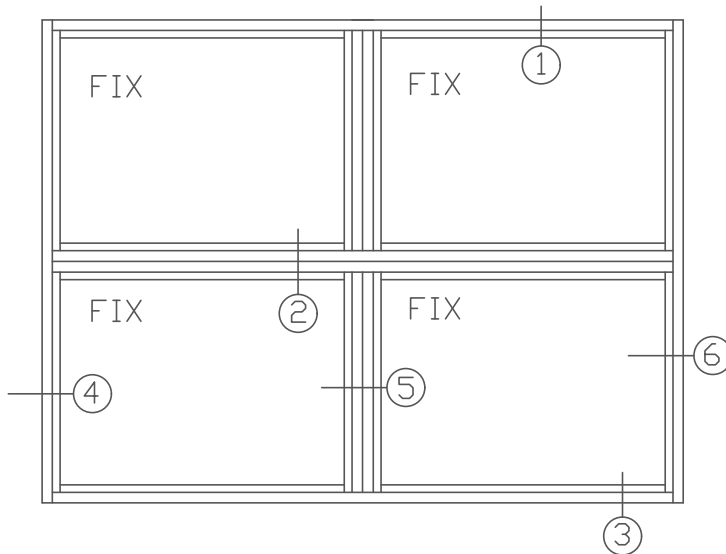

TYPICAL ELEVATION

